

**Gorgiel** ... in warm atmosphere



# ALLIUM

INFORMATION CARD

PREMIUM LINE

KEY FEATURES

- Easy to install.
- Unique workmanship.
- Central connection, bottom, spacing 50 mm.
- Dedicated electrical heater connection
- The product complies with the 442 standard.
- Guaranteed high quality.




Supplied as standard in white [01] with a central bottom connection, spacing 50 mm, type [66]. The valves shown in the photo are optional accessories available at an additional cost.

|                     |   |
|---------------------|---|
| Type:               | AAL - bathroom radiator                           |
| Material:           | Low carbon steel, unalloyed                       |
| Construction:       | Pipe profile 35 x 10<br>Collector trapeze 50 x 35 |
| Work pressure:      | Up to 1,0 MPa (10 bar)                            |
| Work temperature:   | Up to 95°C  |
| Standard equipment: | Air vent 3/8"<br>Radiator bracket type Z 20       |
| Surface finish:     | Supplied in color white [01] as standard          |
| Connection:         | 1/2"  |


|                    | STANDARD   |      |
|--------------------|--|------|
| Connection diagram | [66]   | [67] |
| Connection code    | [M]  |      |
|                    |  |      |
|                    | 1 - odpowietrznik 3/8"<br>4 - standardowo montowany korek 1/2",<br>możliwe zamontowanie grzałki elektrycznej |      |

# ALLIUM

| ALLIUM     | H<br>[mm] | W<br>[mm] | D<br>[mm] | M<br>[mm] | 55/45/20°C<br>[W] | 75/65/20°C<br>[W] | 90/70/20°C<br>[W] | INDEKS         | [kg]  | [dm <sup>3</sup> ] |
|------------|-----------|-----------|-----------|-----------|-------------------|-------------------|-------------------|----------------|-------|--------------------|
| AAL 100/55 | 1045      | 565       | 80        | 50        | 278               | 531               | 669               | 10115141646601 | 16,30 | 5,57               |
| AAL 130/55 | 1310      | 565       | 80        | 50        | 348               | 663               | 834               | 10115141656601 | 20,00 | 6,69               |
| AAL 150/55 | 1510      | 565       | 80        | 50        | 401               | 762               | 958               | 10115141666601 | 23,48 | 7,66               |

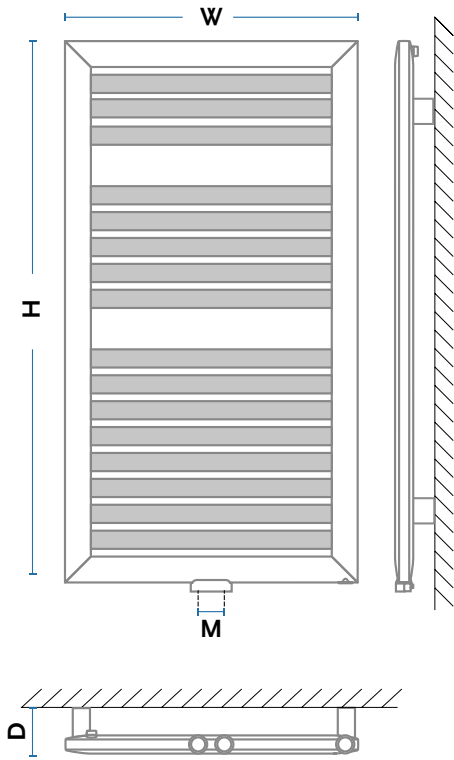

H - height; W - width; D - depth ; M - connection spacing

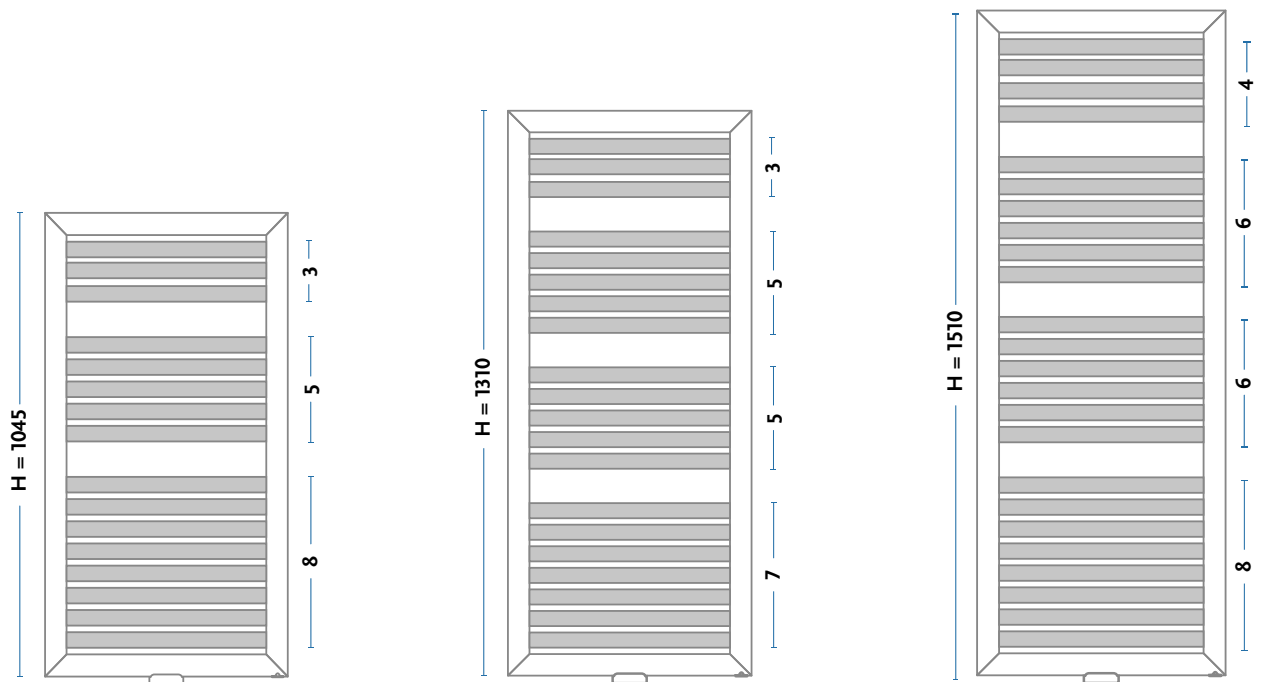




**GORGIEL GROUP Sp. zo.o. Sp.k.**

Karpicko, 64-200 Wolsztyn  
ul. Poznańska 10

tel. +48 68 347 54 00  
fax + 48 68 347 54 50  
gorgiel@gorgiel.com.pl



[gorgiel.pl](http://gorgiel.pl)