

Gorgiel ... *in warm atmosphere*



MARS AR2

INFORMATION CARD


PREMIUM LINE

KEY FEATURES


- Easy to install
- High performance
- Perfect for any bathroom
- Original and aesthetic performance
- The heater complies with the EN 442 standard
- Guaranteed high quality

Supplied as standard in white [01] with type [11] connection. The valves shown in the photo are optional accessories available at an additional cost.


Type:	AR2 - vertical, double bathroom radiator
Material:	Low carbon steel, unalloyed
Construction:	Pipe \varnothing 20 Collector \varnothing 32
Work pressure:	Up to 1,0 MPa (10 bar)
Work temperature:	Up to 95°C
Standard equipment:	Premium plug ½" Premium air vent ½" Radiator bracket type Z 15
Surface finish:	Color white [01]
Connection:	½"

	STANDARD
Connection diagram	[C] 
Connection codes	
	2 - air vent ½" 3 - plug ½"

MARS AR2	H [mm]	W [mm]	D [mm]	C [mm]	55/45/20°C [W]	75/65/20°C [W]	90/70/20°C [W]	INDEKS	[kg]	[dm ³]
AR2 70/50	716	496	111	450	255	489	616	10141135001101	9,32	5,59
AR2 115/50	1126	496	111	450	418	800	1008	10141135101101	14,87	8,92
AR2 140/50	1409	496	111	450	521	997	1257	10141135151101	18,59	11,15
AR2 175/50	1741	496	111	450	626	1210	1530	10141135201101	23,45	14,07
AR2 70/60	716	596	111	550	302	579	730	10141136001101	10,88	6,53
AR2 115/60	1126	596	111	550	499	956	1205	10141136101101	17,36	10,42
AR2 140/60	1409	596	111	550	622	1191	1501	10141136151101	21,70	13,03
AR2 175/60	1741	596	111	550	755	1445	1821	10141136201101	27,39	16,44
AR2 115/75	1126	746	111	700	633	1188	1487	10141137001101	21,09	12,67
AR2 140/75	1409	746	111	700	800	1531	1930	10141137051101	26,36	15,84
AR2 175/75	1741	746	111	700	931	1799	2275	10141137101101	33,30	20,00

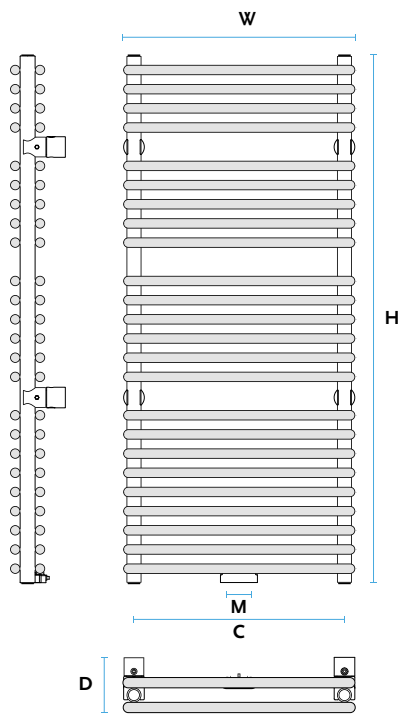

H - height; W - width; D - depth;
C - connection spacing;

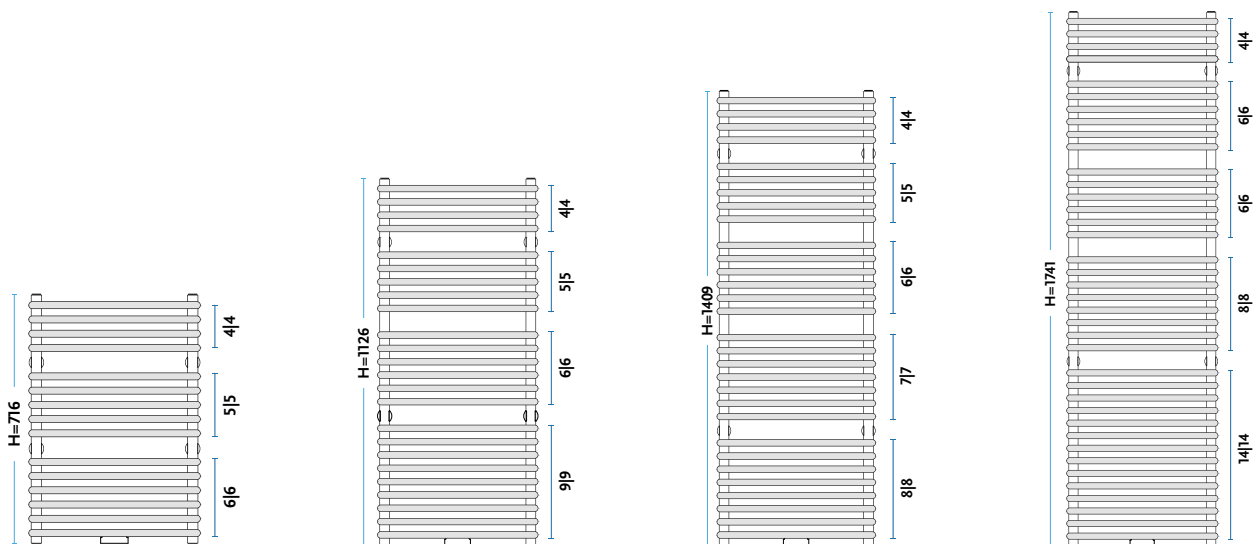



GORGIEL GROUP Sp. zo.o. Sp.k.

Karpicko, 64-200 Wolsztyn
ul. Poznańska 10

tel. +48 68 347 54 00
fax + 48 68 347 54 50
gorgiel@gorgiel.com.pl



gorgiel.pl