



Colour: Grey pyrite [17]



Zenith w


Colour: White [01]
Connection: [11]





Zenith w

Supplied as standard in white with T1 connection. Valves shown in the photo are optional and charged separately.

Type :	AZW- vertical radiator
Material:	low carbon steel
Construction:	collector profile triangle 56 x 35 pipe profile 35 x 10
Work pressure:	up to 1,0 Mpa
Work temperature:	up to 95°C
Standard equipment:	plug premium ½", air vent premium ½" radiator bracket Z 20
Finishing:	Standard colour white [01]
Threads:	½" Gw

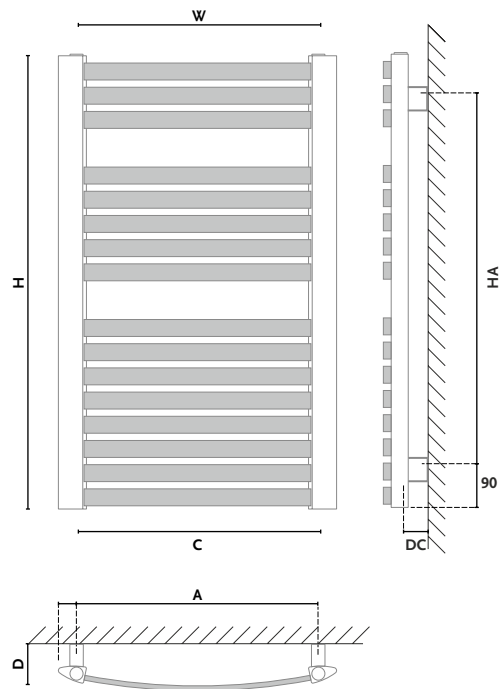

STANDARD

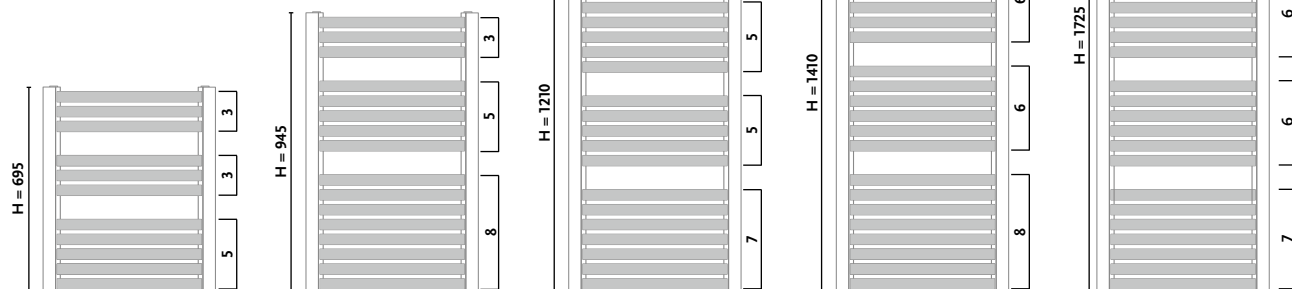

Zenith W	H [mm]	W [mm]	D [mm]	DC [mm]	C [mm]	A [mm]	HA [mm]	INDEKS	n	55/45/20°C [W]	75/65/20°C [W]	e [W]
AZ-W 70/60	695	580	100	48	500	510	525	1011136110 1101	1,2304	190	356	300
AZ-W 95/60	945	580	100	48	500	510	775	1011136120 1101	1,2400	257	485	300
AZ-W 120/60	1210	580	100	48	500	510	1040	1011136130 1101	1,2400	330	621	600
AZ-W 140/60	1410	580	100	48	500	510	1240	1011136140 1101	1,2400	384	724	600
AZ-W 175/60	1725	580	100	48	500	510	1555	1011136150 1101	1,2491	468	886	600
AZ-W 95/70	945	680	100	48	600	610	775	1011136220 1101	1,2400	302	569	300
AZ-W 120/70	1210	680	100	48	600	610	1040	1011136230 1101	1,2266	390	729	600
AZ-W 140/70	1410	680	100	48	600	610	1240	1011136240 1101	1,2400	451	849	600
AZ-W 175/70	1725	680	100	48	600	610	1555	1011136250 1101	1,2465	550	1040	900

RECOMMENDED:

VALVE - SMART 1 in the colour of the radiator for connection [11]



VALVE - CORNER in chrome for connection [11]



GOR electric heating element

